

SQT18 Series Dual Axis joystick

Product Features

SQT18 Industrial joystick is suitable for AC 380V (440V) circuit, Can achieve motor control, speed regulation, braking and other functions.

Application




SQT18 can be installed in the control Platform or portable control box, widely used in ports, shipping, railway, Metallurgy, mining, construction and other industries.



Technical Information

Operating temperature	-20°C ~ +60°C
Operating torque	≤20N
Maximum operating direction	8
The number of mechanisms can be controlled	2
Maximum number of gears	6
Installation of flange protection grade	IP54
Potentiometer can be added to each master	2
Nominal voltage	380V/440/24V
Rated current	10A
Mechanical life	5,000,000 cycle


Circuit

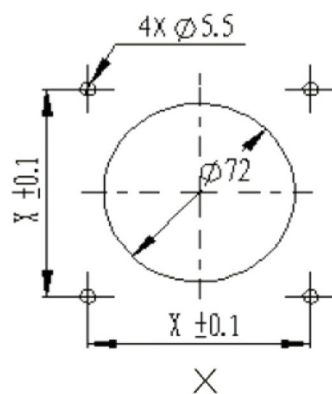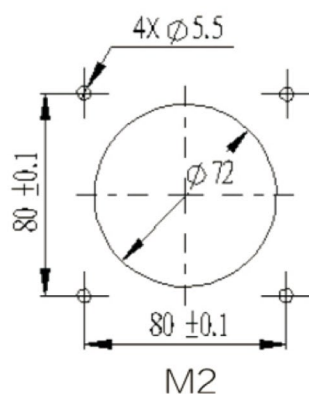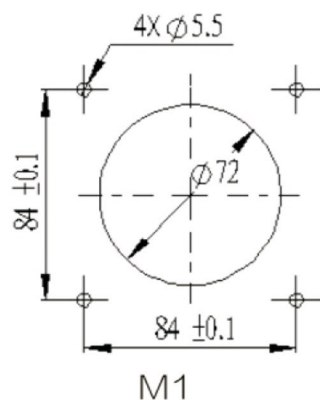


Product Installation

Type	Contact number	Size A	Size B
01	2	98	135
02	4	110.5	147.5
03	6	123	160
04	8	135.5	172.5
05	10	148	185
06	12	160.5	197.5


Contact group installation mode

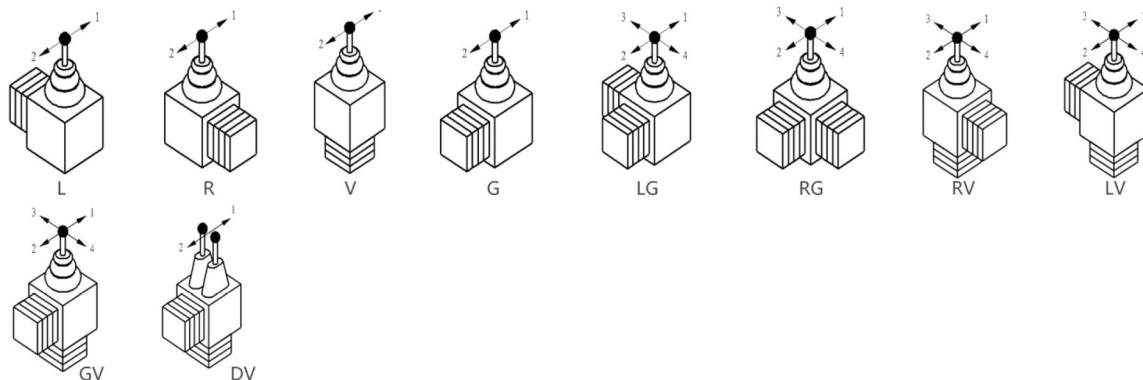

Potential closing table

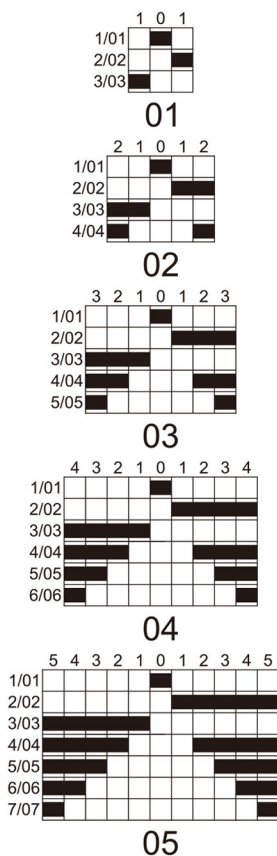

◆ If you have any other requirements, please mark X on the chart below

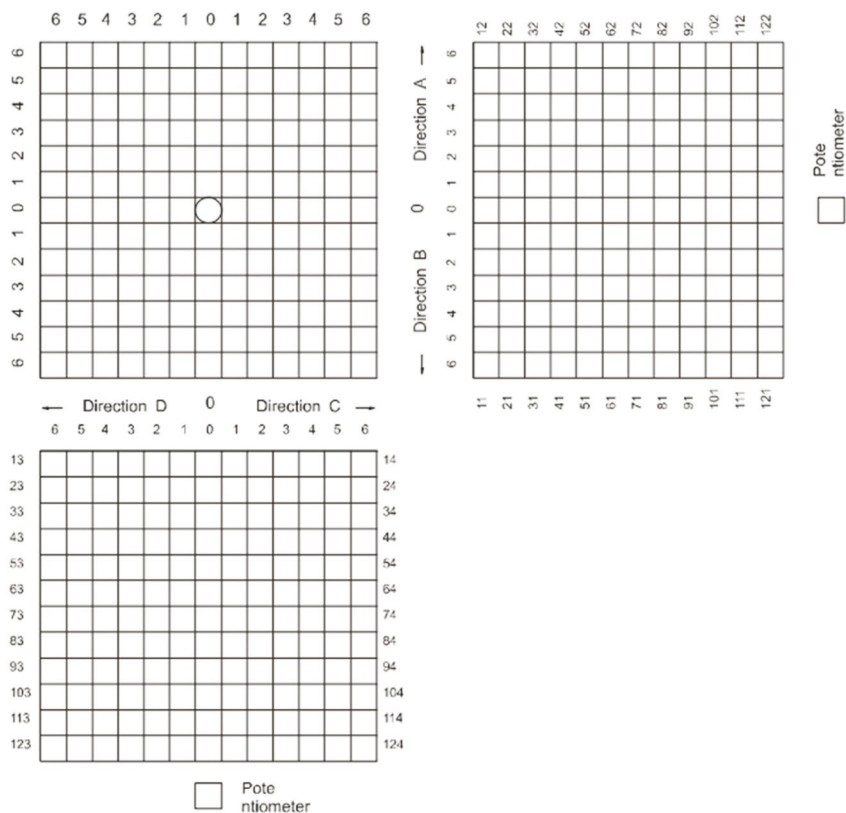

Hand type

